

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 971 064 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

12.01.2000 Bulletin 2000/02

(51) Int. Cl.⁷: **D06N 7/00**

(21) Application number: **99113255.6**

(22) Date of filing: **08.07.1999**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **10.07.1998 US 113842**

(71) Applicant: **Milliken & Company
Spartanburg, SC 29304 (US)**

(72) Inventor: **Rockwell, James N. Jr.**

LaGrange, GA 30240 (US)

(74) Representative:

Behrens, Dieter, Dr.-Ing. et al

Wuesthoff & Wuesthoff

Patent- und Rechtsanwälte

Schweigerstrasse 2

81541 München (DE)

(54) **Floor mat solely comprised of monofilament nylon fiber and having an ozone resistant non-staining backing sheet**

(57) This invention relates to a floor mat primarily for use in an outdoor environment wherein the mat includes a tufted carpet solely comprised of nylon monofilament fibers. Furthermore, this mat comprises a foam rubber backing which possesses a high level of ozone resistance and simultaneously will not appreciably stain a handler's skin or a floor's surface with carbon particles. The utilization of all monofilament nylon fibers provides for the extremely effective removal of moisture, dirt, and debris from the footwear of pedestrians and also permits easy cleaning and effective drying of the overall article. The utilization of a foam rubber backing also allows for heavy duty industrial-scale laundering in such standard washing machines without appreciably damaging either the washing machines or inventive floor mats themselves.

EP 0 971 064 A2

Description

[0001] This invention relates to a floor mat primarily for use in an outdoor environment wherein the mat includes a tufted carpet solely comprised of nylon monofilament fibers. Furthermore, this mat comprises a foam rubber backing which possesses a high level of ozone resistance and simultaneously will not appreciably stain a handler's skin or a floor's surface with carbon particles. The utilization of all monofilament nylon fibers provides for the extremely effective removal of moisture, dirt, and debris from the footwear of pedestrians and also permits easy cleaning and effective drying of the overall article. The utilization of a foam rubber backing also allows for periodic heavy duty industrial-scale laundering in such standard washing machines without appreciably damaging the inventive floor mat.

[0002] Floor mats have long been utilized to facilitate the cleaning of the bottoms of people's shoes, particularly in areas of high pedestrian traffic such as doorways. Moisture, dirt, and debris from out of doors easily adhere to such footwear, particularly in inclement weather and particularly in areas of grass or mud or the like. Such unwanted and potentially floor staining or dirtying articles need to be removed from a person's footwear prior to entry indoors. As will be appreciated, such outdoor mats by their nature must undergo frequent repeated washings and dryings so as to remove the dirt and debris deposited thereon during use. These mats are generally rented from service entities which retrieve the soiled mats from the user and provide clean replacement mats on a frequent basis. The soiled mats are thereafter cleaned and dried in an industrial laundering process and then sent to another user in replacement of newly soiled mats.

[0003] Such floor mats have had at least three significant problems arising from frequent washings and harsh environments of use. First, the energy required to wash and dry a typical floor mat is significant due to the overall mass of the mats. This overall mass is made up of the mass of the mat pile, the mass of the carrier fabric into which the mat pile is tufted, and most significantly, the mass of the rubber backing sheet which is integrated to the carrier fabric under heat and pressure. As will be appreciated, a reduction in the overall mass of the floor mat will result in a reduced energy requirement in washing and drying the mat. Moreover, a relative reduction in the mass of the rubber backing sheet (i.e. the heaviest component) will provide the most substantial benefit. The floor mat of the present invention includes a rubber backing sheet which may possess a specific gravity which is approximately 25 percent less than the rubber sheets of typical prior floor mats. Accordingly, the overall energy requirements associated with the cleaning and handling of these mats is substantially reduced over that of prior mats. Furthermore, the tufted carpet pile of the inventive mats is comprised of all nylon monofilaments which facilitates drying of the mat upon exposure to standard environmental temperatures (i.e., 25°C). In this manner, the necessity of drying such articles within an industrial drying machine is overcome, again translating into a reduction of the energy requirements required to properly clean the inventive mats.

[0004] The second problem which is encountered is the deterioration of the carbon-carbon double bonds in the matrix of the rubber backing sheet due to the exposure of the sheets to an oxidizing environment during use and cleaning. Specifically, the exposure of the mats to oxidizing agents during the washing and drying process tends to cleave the carbon-carbon double bonds of the rubber sheet thereby substantially embrittling the rubber which leads to cracking under the stress of use. In addition to the laundering process, the exposure of the mats to oxygen and ozone, either atmospheric or generated, during storage and use leads to cracking over time. The mat of the present invention incorporates a rubber backing sheet which provides enhanced protection against oxygen as measured by standard ozone resistance tests and is thereby believed to substantially prolong the useful life of the mat. Accordingly, the mat of the present invention represents a useful advancement over the prior art.

[0005] The third major problem has been the staining ability of such rubber backed mats upon contact with various surfaces, such as concrete, wood, and a handler's skin, just to name a few. The carbon particles within the rubber backing sheet of such mats become disassociated and thus easily rub off upon contact with many different surfaces. The inventive mat has remedied this problem through a specific rubber/polymer additive formulation within the backing sheet component. Such a remedy has not been taught or fairly suggested within the prior art to date.

[0006] Floor and/or dust mats, in particular those having a tufted carpet pile partially comprised of coarse multifilament fibers, have been developed which provide an easy manner of cleaning the soles of a person's shoes simply by scraping the footwear against such a stiff article. Examples of such floor mats are exemplified in U. S. Patents 1,008,618, to Skowronski et al., 4,045,605, to Breens et al., and 4,353,944, to Tarui, as well as French Patent No. 1,211,755, assigned to Cosyntex (S.A.) and PCT Application 95/30040, assigned to Kleen-Tex Industries, Inc. Although coarse fibers have been disclosed for floor mats, there are no prior art references which teach nor fairly suggest the presence of all monofilament nylon fibers.

[0007] Further improvements over the basic all-coarse (but not all-monofilament) mats included interspersed coarse and fine carpet pile yarns, either in stripe or checkerboard patterns, as taught by U. S. Patents 4,820,566 and 5,055,333, both to Heine et al., or in separate regions of the same article, as in Tarui and Kleen-Tex, above. All of the aforementioned patents documents are incorporated herein by reference. Nowhere in the prior art is an industrially launderable floor mat comprised solely of monofilament nylon fibers and further comprising a either a solid or foam rubber backing including ozone resistance components which does not appreciably stain a handler's skin or a floor's sur-

face disclosed or fairly suggested. The only ozone resistance backing sheet taught within the prior art is European Patent 702,929, to Milliken Research Corporation. This reference does not teach the same proportions of rubber to EPDM additive so as to also provide stain reduction, however. As a result, a need exists for such an improved, easily laundered or cleaned, nylon monofilament floor mat having a rubber backing which is ozone resistant and which will not appreciably stain contacted surfaces.

[0008] It is thus an object of this invention to provide a floor mat for primary use in an outdoor environment which allows for maximum scraping and thus cleaning of a pedestrian's footwear. Furthermore, it is an object of the invention to provide an outdoor floor mat which possesses suitable flexibility to withstand periodical laundering in industrial washing machines and which will efficiently and effectively become dry upon exposure to air after a short period of time. Still a further object of this invention is to provide an outdoor mat which will not easily degrade due to continuous exposure to ozone, both in an outdoor environment and during industrial washing processes. Yet another object of the invention is to provide a outdoor mat which will not transfer carbon particles in an appreciable amount from its rubber backing to any surfaces in which it comes into contact.

[0009] Accordingly, this invention encompasses a floor mat comprising

a carrier fabric;
a pile material tufted into the carrier fabric which forms a pile surface on one side of the carrier fabric, wherein

said pile material is comprised of

all monofilament nylon fibers having deniers of from about 200 to about 400; and

a vulcanized expanded backing sheet of rubber integrated to the other side of the carrier fabric, wherein

said rubber backing is comprised of

a mixture of rubber compounds selected from the group consisting essentially of NBR and EPDM, SBR and EPDM, and SBR, NBR, and EPDM; and
optionally, a blowing agent to produce a closed cell structure foam rubber;

wherein said floor mat possesses suitable flexibility to be laundered on a regular basis in a standard industrial washing machine without appreciably damaging said mat or said machine; and
wherein said floor mat will not transfer an appreciable amount of carbon particles from said rubber backing sheet to any surfaces in which it comes into contact.

[0010] The inventive mat is primarily for outdoor use. The composition of the tufted carpet (all monofilament nylon fibers) facilitates drying of the mat upon exposure to precipitation. Furthermore, heavy rains which may produce running water through such a mat, will not become trapped within the carpet either. Such a configuration provides an outdoor mat which will not retain a substantial amount of rainwater. As a result, the inventive mat will not become saturated with moisture and thus will continue effectively to remove dirt and debris from pedestrians' footwear shortly after exposure to precipitation. Furthermore, the inventive mat is well-suited for outdoor use because of its resistance to ozone. Exposure to the elements in an outdoor environment usually increases the degradation of rubber articles. The utilization of a certain amount of ethylene-propylene diene comonomer rubber (EPDM) aids in reducing this rate of degradation due to ozone exposure. However, EPDM is cost prohibitive for use within floor mat backings. It was therefore necessary to develop a more cost-effective rubber backing which possessed the maximum degree of ozone resistance. Furthermore, since the inventive mat would be handled often, would necessarily undergo periodic industrial cleaning, and would remain on surfaces which could be discolored by standard rubber compositions, it was also important to consider these criteria during the development of the proper rubber backing for the inventive mat.

[0011] The inventive floor mat generally comprises a tufted carpet pile of nylon monofilament fibers attached to the rubber sheet which has been vulcanized. A related, although by no means identical or similar, floor mat comprised of a tufted carpet pile on a vulcanized rubber sheet is exemplified in U.S. Patent 5,585,565, to Nagahama et al., hereby entirely incorporated by reference, except that the inventive article comprises specific ozone resistance characteristics which are neither taught nor fairly suggested by patentee. For the inventive floor mat, the attachment of the rubber sheet to the monofilament nylon carpet pile can be accomplished during the actual vulcanization step, as taught in Nagahama, for example, above, or through the use of an adhesive layer, preferably a polyolefin adhesive, between the carpet pile and the rubber sheet.

[0012] The utilization of all monofilament nylon fibers having deniers from 200 to 400 within the tufted carpet component of the inventive provides an excellent surface to which the majority of the potential moisture, dirt, and debris from

pedestrians' shoes will be transferred upon scraping. When such a mat is utilized outside an edifice, the majority of unwanted dirt, debris, and the like, will become trapped within the article and will not be transferred to the shoes of a subsequent pedestrian, thus preventing the potential "re-tracking" of moisture, dirt, and debris through the interior. A more effective way of cleaning and scraping a pedestrian's shoes as well as the insurance that the interior of an edifice will remain clean are thus provided.

[0013] With such uniformly coarse fibers, the dirt and grime removed from a pedestrian's footwear is easily trapped; however, upon washing, such debris is also easily removed from the mat. Furthermore, such monofilament fibers do not require the need for drying in industrial drying machines as any excess moisture picked up in a washing vessel will easily evaporate from the surface of such nylon fibers upon exposure to ambient temperature (*i.e.*, 25°C). This characteristic of the inventive mat therefore also translates into cost reductions for the consumer as only a washing procedure is required in order to clean the article effectively. Additionally, with such monofilament fibers, rainwater will not become trapped in any appreciable amount and, in fact, will easily pass through the tufted carpet portion. Again, upon exposure to ambient temperature, any excess rainwater left on the mat will quickly and easily evaporate from the surface, resulting in a floor mat which retains the ability to fully function as it was intended without the need to be dried on an industrial scale prior to reuse.

[0014] The term denier, as it applies to yarns, refers to the weight of a fiber in grams having a length of 9,000 meters. The specific range of suitable deniers for the inventive floor mat nylon monofilament fibers is between about 200 and 400 dpf. Preferably, the fibers have an average dpf of between about 300 and 400, while even more preferable is an average of about 300. In general, heavy, coarse fibers generally reside in a very wide range of deniers from about 100 to about 5,000 denier per filament ("dpf"). The preferred ranges noted above are thus in a rather narrow subrange. This subrange has been found to provide the most effective cleaning, washing, and outdoor drying capabilities for the inventive mat. Also of great interest in developing this inventive mat was the fact that denier per fiber translates into an aggregate weight for the overall carpet pile. The amount of and weight of fibers within a tufted pile is therefore of great importance in order to keep the weight of the inventive mat at a sufficiently low level to facilitate cleaning in industrial laundering processes. By providing a lower overall weight for the inventive mat product, lower amounts of energy will be required to clean the mat in an industrial scale process which will translate into lower costs for the consumer. Thus, the carpet pile of the inventive mat should possess an average weight of between about 15 and 25 ounces per square yard, which a preferred average falling between about 19 and 22. These ranges translate into from about one to two million monofilament fibers per square yard, with a particularly preferred range being from about 1.45 to about 1.5 million.

[0015] The selection of all nylon monofilament fibers is critical within the inventive floor mat for a number of reasons. First of all, as noted above, monofilaments provide a stiffer surface for better scraping and thus removal of dirt and debris from a pedestrian's footwear. Nylon must be utilized because it withstands the high temperatures and pressures employed during the required vulcanization step in order to form the entire inventive mat. In the past, again as noted above, carpet pile surfaces for floor mats have incorporated both coarse and fine fibers of cotton, polypropylene, nylon, and the like, together. Such combinations of differing deniers are able to withstand the harsh conditions associated with vulcanization, even when fibers possessing relatively low melting points (such as polypropylene) are employed. However, all monofilament structures do not easily retain their form without at least becoming partially damaged or altered due to such vulcanization temperatures. The selection of nylon between 200 and 400 dpf is thus critical for providing a suitable mat which will not lose its ability to scrape or clean properly after being subjected to high vulcanization temperatures. Furthermore, in comparison with other fibers possessing similar high melting points, nylon is less expensive and thus its utilization would not translate into increased costs for the end user unlike the use of other, more expensive, high melting point, synthetic fibers.

[0016] As noted above, the inventive floor mat can easily be removed from the floor or ground and can be easily laundered through, preferably, industrial washing processes utilizing standard heavy duty washing machines. For this reason, the inventive floor mat must a backing sheet which possesses suitable flexibility so as not to damage such machinery (not to mention itself) when subjected to such rigorous cleaning procedures. Furthermore, the inventive floor mat also possesses a specific degree of ozone resistance which is necessary not only to combat degradation from exposure to outdoor environments, but also to protect the mat from degradation due to contact with harsh detergents, and the like, within such cleaning processes. Although the inventive floor mat is produced preferably to withstand the rigors of industrial machine washing, hand washing and any other manner of cleaning may also be utilized. The inventive mat must only be able to withstand such industrial cleaning procedures. As a result, the inventive mat provides a long-lasting article which is easily cleaned, and thus remains aesthetically pleasing to users (*i.e.*, pedestrians) over the life of the mat. All of this translates into reduced cost for the consumer as fewer mats need to be purchased in order to provide a suitable barrier to outdoor dirt and moisture.

[0017] The invention will now be described in more details by reference to an exemplary embodiment.

FIG. 1 is a schematic representation of a floor mat manufacturing machine.

FIG. 2 illustrates a molded floor mat as it exits the mat manufacturing machine of FIG. 1.

FIG. 3 is a partial cross-sectional view of a completed vulcanized floor mat.

[0018] Turning now to the drawings wherein like elements are designated by like reference numerals in the various views, in FIG. 1 is shown a schematic of a floor mat manufacturing machine 10 for producing the floor mat 12 (FIGS. 2 and 3) of the present invention. In the illustrated and preferred form of the invention, the floor mat 12 comprises pile monofilament yarns 14 of nylon tufted through a woven or nonwoven carrier layer 16 of suitable material with the bottom 18 of the tufts adhered to a rubber backing sheet 20. This adherence of the rubber backing sheet 20 to the carrier layer 16 and bottom of the tufts is effected during vulcanization (i.e. cross-linking) of the rubber backing sheet under heat and pressure as is well known to those of skill in the art. If desired, the bottom of the rubber backing sheet may also include a plurality of anti-creep cleats (not shown) as are well known in the art. As shown in FIG. 2, the floor mat 12 of the present invention also preferably includes a border portion 24 around the perimeter.

[0019] The floor mat 12 of the present invention is assembled molded and vulcanized on the manufacturing machine 10 of FIG. 1. The manufacturing machine 10 which is well known to those of skill in the art includes an endless, teflon coated conveyor belt 26 to carry the floor mats 12 from an assembly station 28, into a press molding apparatus 32, to a post cure oven 33 and out to a separating station 34. The press molding apparatus 32 can be of any type which is suitable such as that shown in U.S. patent 4,447,201 to Knudsen (incorporated by reference).

[0020] In production of the dust control mats 12 of the present invention, the mats are preassembled at station 28 by laying down a metal plate or silicone or butyl pad 36 on the conveyor belt 26. The rubber backing sheet 20 as described more fully below is placed over the silicone pad and the tufted fabric comprising the pile yarns 14 tufted through the carrier layer 16 is placed on top of the rubber backing sheet 20. In the preferred practice, the rubber backing sheet laid down at the assembly station 28 is a solid calendared sheet of green (i.e. unvulcanized) acrylonitrile-butadiene rubber (NBR) or styrene butadiene rubber (SBR) mixed with a polymer additive such that the ratio of the NBR or SBR to the polymer additive is between about 0.33 and 1.0.

[0021] The conveyor belt 26 is then indexed to place the preassembled mat into the press mold 32 while a second mat is preassembled at station 28. While the first mat is in the press mold 32, it is exposed to a temperature between about 280°F (138°C) and about 300°F (149°C). While in the press mold 32, the mat is exposed to pressures in the range of between about 20 psi (0.14 MPa) and 40 psi (0.28 MPa). At the temperature and pressure occurring in the press mold 32, the rubber backing sheet 20 undergoes vulcanization and is integrated to the carrier layer 16 of the mat to form a substantially unitary structure. After about 3 to 6 minutes the conveyor belt 26 is again indexed to move the first vulcanized mat into a post cure oven 33 to complete the vulcanization but without the application of pressure. During this time yet a third mat is preassembled at station 28 while the second mat is indexed to the press mold.

[0022] In the preferred practice, the post cure oven is operated at a temperature between about 280°F (138°C) and 300°F (149°C) but no pressure is applied to the mat. After another 3 to 6 minutes, the conveyor belt is again indexed to move the first mat into the stripping station 34 wherein it is removed from the silicone pad and the conveyor belt 26 (FIG. 2) while the second, and third mats are indexed into the post cure oven 33, and the press mold 32 respectively, and a fourth mat is preassembled at station 28. As will be appreciated, the mat may also undergo a preheating operation prior to entering the press mold if desired as described in U.S. patent 4,886,692, to Kerr.

[0023] As previously indicated, in the preferred embodiment of the present invention the base material for the rubber backing sheet 20 is acrylonitrile-butadiene rubber (NBR) or styrene-butadiene rubber (SBR). Other materials which may also be used include, by way of example, hydrogenated NBR and carboxylated NBR although the use of these materials may be cost prohibitive. As will be appreciated, the use of NBR or SBR is desirable from a cost perspective. However, these materials may be susceptible to oxidation and ozone attack (referred to as ozonation) due to the presence of unsaturated carbon-carbon double bonds. Moreover, the specific gravity of fully vulcanized NBR or SBR compositions is relatively high being in the range of about 1.2 to about 1.45 which may result in a relatively heavier overall mat structure.

[0024] The present invention makes use of fluxing technology to combine EPDM in formation of the rubber backing sheet 20 to provide enhanced resistance to oxidation and ozonation while at the same time yielding a lighter material through the addition of chemical blowing agents. Specifically, in the preferred embodiment, the rubber backing sheet 20 of the present invention comprises either NBR mixed with EPDM, and optionally with a blowing agent, in a fluxing operation or SBR mixed with EPDM, and optionally with a blowing agent, in a fluxing operation wherein the EPDM is mixed at a level such that the ratio of EPDM to the base rubber (NBR or SBR) is between about 3.0 (i.e. 75 parts EPDM and 25 parts base rubber) and about 1.0 (i.e. 50 parts EPDM and 50 parts polymer additive). Preferably, this ratio is about 1.5 (i.e. 60 parts EPDM and 40 parts base rubber). This fluxing operation preferably takes place in a standard rubber internal mixer such as a Banbury mixer which is well known to those of skill in the art at a temperature of about 280°F (138°C) to 300°F (149°C).

[0025] The rubber mixture is thereafter calendared as a solid sheet of unvulcanized material which is used in the manufacture of the floor mat 12 in the process as described above. In practice, the raw NBR is believed to be available from

Miles Inc. Rubber Division in Akron, Ohio. The SBR may be purchased from Goodyear Tire and Rubber Company in Akron, Ohio. The EPDM may be purchased from Exxon Corporation under the trade designation Vistalon[®].

[0026] In the preferred practice of the present invention, a masterbatch of the polymer components is first prepared by mixing the base rubber (either NBR or SBR) with the additive ozone resistant polymer (EPDM) in the desired ratio along with various stabilizers and processing agents. Exemplary compositions of the masterbatch for various additive ratios wherein EPDM is mixed with NBR are provided in Table 1A for ratios of NBR to the additive polymer of 9.0 (Column a), 2.3 (Column b) and 1.2 (Column c).

TABLE 1A

MATERIAL	PARTS BY WEIGHT		
	a	b	c
Rubber (NBR)	40	25	50
Additive Polymer (EPDM)	60	75	50
Plasticizer	10	5	15
Stabilizer	2	2	2
Processing Aid	1.75	1.75	1.75
Antioxidant	1.2	1.2	1.2

[0027] In the preferred practice the plasticizer which is used is diisononylphthalate. The stabilizer is trionylphenol-phosphate available from Uniroyal Chemical under the trade designation Polyguard[®]. The processing aid is purchased from the R.T. Vanderbilt Company in Norwalk Connecticut under the trade designation Vanfree[®] AP-2. The antioxidant is purchased from Uniroyal Chemical under the trade designation Octamine[®].

[0028] Following the mixing of the masterbatch, curative agents are added in a second stage mixing process for formation of the raw rubber compound which forms the backing sheet 20 of the mat 12 of the present invention. An exemplary composition of the raw rubber compound formed in this second stage mixing process is provided in Table 1B.

TABLE 1B

MATERIAL	PARTS BY WEIGHT
Masterbatch Blend	100
Sulfur	1.25
Stearic Acid	1
Carbon Black N-550	40
Vulkacit Thiaram MS (TMTM)	0.5
Zinc Oxide	5
Blowing Agent	2.5

[0029] Exemplary compositions of the masterbatch for various additive ratios of SBR to EPDM are provided in Table 2A in a manner similar to that of Table 1A.

TABLE 2A

MATERIAL	PARTS BY WEIGHT		
	a	b	c
Rubber (SBR)	40	25	50
Additive Polymer (EPDM)	60	75	50

TABLE 2A (continued)

MATERIAL	PARTS BY WEIGHT		
	a	b	c
Stearic Acid	1	1	1
Sunolite 240	2	2	2
Zinc Oxide	5	5	5
Carbon Black N-550	30	30	30
Carbon Black N-224	60	60	60
Calcium Carbonate	35	35	35
Talc	30	30	30
Supar 2280	80	80	80

[0030] After mixing of the SBR masterbatch, curative agents are preferably added in a second stage mixing process for formation of the raw rubber compound which forms the backing sheet 20 of the mat 12 of the present invention. An exemplary composition of the raw rubber compound formed in this second stage mixing process is provided in Table 2B.

TABLE 2B

MATERIAL	PARTS BY WEIGHT
Masterbatch Blend	100
Sulfur	2
Methyl Zimate	1.25
Butyl Zimate	1.25
Dibutyl Thiurea	2.50
Tellurium Diethyldithiocarbamate	1
Blowing Agent	2.0

[0031] As previously indicated and shown above, the rubber backing sheet 20 may include, and in some cases preferably includes, a blowing agent to effectuate the formation of closed gas cells in the rubber during vulcanization. The blowing agent which is preferably used is a nitrogen compound organic type agent which is stable at normal storage and mixing temperatures but which undergoes controllable gas evolution at reasonably well defined decomposition temperatures. By way of example only and not limitation, blowing agents which may be used include: azodicarbonamide (Celogen® AZ-type blowing agents) available from Uniroyal Chemical Inc. in Middlebury Connecticut and modified azodicarbonamide available from Miles Chemical in Akron, Ohio under the trade designation Porofor® ADC-K.

[0032] It has been found that the addition of such blowing agents at a level of between about 1 and about 5 parts by weight in the raw rubber composition yields a rubber sheet having an expansion factor of between about 50 and 200 percent. It has been further found that this expansion using these materials yields a final vulcanized rubber backing sheet having a specific gravity of less than about 0.98 and preferably between about 0.5 and about 0.98.

[0033] After the fluxing processes are completed, the uncured rubber compound containing EPDM and the blowing agent is assembled with the pile yarns 14 and carrier layer as previously described. The vulcanization of the rubber backing sheet is then at least partially effected within the press molding apparatus 32 wherein the applied pressure is between 20 and 40 psi (0.14 and 0.28 MPa). Under the high temperatures and pressure, the nitrogen which is formed by the blowing agent partly dissolves in the rubber. Due to the high internal gas pressure, small closed gas cells are formed within the structure as the pressure is relieved upon exit from the press molding apparatus. In the preferred practice the post cure oven 33 is used to complete the vulcanization of the mat and provide additional stability to the resulting product.

[0034] As previously indicated, a primary object of the present invention is to provide enhanced resistance to oxidation and ozonation which tend to weaken the carbon-carbon double bonds in the rubber. Analysis was performed on the rubber sheet through empirical testing and viewing of the sheet after long-term exposure in an outdoor environment and

after a number of washes in a standard industrial scale laundry machine. Upon such environmental exposure and after such cleaning conditions the inventive mat did not show any appreciable damage or degradation in its structure.

EXAMPLE

[0035] A rubber sheet material was produced by fluxing together the materials as set forth in Table 1A in a standard rubber internal mixer at a temperature of about 280°F (138°C) to 300°F (149°C) for a period of one to two minutes. EPDM additions were varied as shown in Table 1A to yield ratios of EPDM to NBR of 3.0 (75 parts EPDM to 25 parts NBR); 1.5 (60 parts EPDM to 40 parts NBR); and 1.0 (50 parts EPDM to 50 parts NBR). Additions of curative agents as provided in Table 1B were then made. Uncured sheets of the fluxed rubber compounds were then calendared and cured at a temperature of about 290°F (143°C) for five (5) minutes under a pressure of about 40 psi (0.28 MPa) and post cured at a temperature of about 290°F (143°C) at atmospheric pressure for a period of five (5) minutes. Sample strips of the cured rubber sheets were then viewed empirically for damage and/or degradation. No such problems were evident in the subject inventive mat rubber backing sheet material. Comparative sheets comprising fully cured NBR without EPDM added showed a great deal of degradation and cracking within the sheet structure.

[0036] Furthermore, testing was performed to analyze the potential staining capability of the inventive mat backing sheet. After vulcanization and cooling, the inventive floor mat did not exhibit any appreciable staining of contacted surfaces. For instance, the carbon particles within the rubber backing sheet did not rub off onto a handler's skin or within a cardboard container upon transport; upon placement in an area of high pedestrian traffic for a week the floor did not exhibit any appreciable carbon staining from the rubber backing sheet; and upon laundering in an industrial washing machine, the interior of the washing vessel did not exhibit any appreciable carbon staining from the rubber backing sheet. A 1.5 ratio of EPDM to NBR provided the least amount (although all were *de minimis*) of staining and thus is the preferred embodiment for the inventive floor mat.

[0037] While the invention has been described and disclosed in connection with certain preferred embodiments and procedures, these have by no means been intended to limit the invention to such specific embodiments and procedures. Rather, the invention is intended to cover all such alternative embodiments, procedures, and modifications thereto as may fall within the true spirit and scope of the invention as defined and limited only by the appended claims.

Claims

1. A floor mat comprising

a carrier fabric;

a pile material tufted into the carrier fabric which forms a pile surface on one side of the carrier fabric, wherein

said pile material is comprised of

all monofilament nylon fibers having deniers of from about 200 to about 400; and

a vulcanized expanded backing sheet of rubber integrated to the other side of the carrier fabric, wherein

said rubber backing is comprised of

a mixture of rubber compounds selected from the group consisting essentially of NBR and EPDM, SBR and EPDM, and SBR, NBR, and EPDM; and

optionally, a blowing agent to produce a foam rubber having a closed cell structure;

wherein said floor mat possesses suitable flexibility to be laundered on a regular basis in an industrial washing machine without appreciably damaging said mat or said machine; and

wherein said floor mat will not transfer an appreciable amount of carbon particles from said rubber backing sheet to any surfaces in which it comes into contact.

2. The floor mat of Claim 1 wherein

the nylon fibers are comprised of nylon-6, of nylon-6,6 or of mixtures of nylon-6 and nylon-6,6; and
the rubber backing comprises from about 50 to about 75% EPDM and from about 25 to about 50% NBR.

3. The floor mat of Claim 1 wherein

the nylon fibers are comprised of nylon-6, of nylon-6,6 or of mixtures of nylon-6 and nylon-6,6; and
the rubber backing comprises from about 50 to about 75% EPDM and from about 25 to about 50% SBR.

5

4. The floor mat of Claim 1 wherein

the nylon fibers are comprised of nylon-6, of nylon-6,6 or of mixtures of nylon-6 and nylon-6,6; and
the rubber backing comprises about 60% EPDM and about 40% NBR.

10

5. The floor mat of Claim 1 wherein

the nylon fibers are comprised of nylon-6, of nylon-6,6 or of mixtures of nylon-6 and nylon-6,6; and
the rubber backing comprises about 60% EPDM and about 40% SBR.

15

6. The floor mat of Claim 1 wherein

the rubber backing comprises a mixture of NBR, SBR, and EPDM.

20

7. The floor mat of Claim 1 wherein

said blowing agent is present;
wherein said backing sheet possesses a specific gravity of below about 0.98 and preferably above 0.5 g/cm³.

25

30


35

40

45

50

55

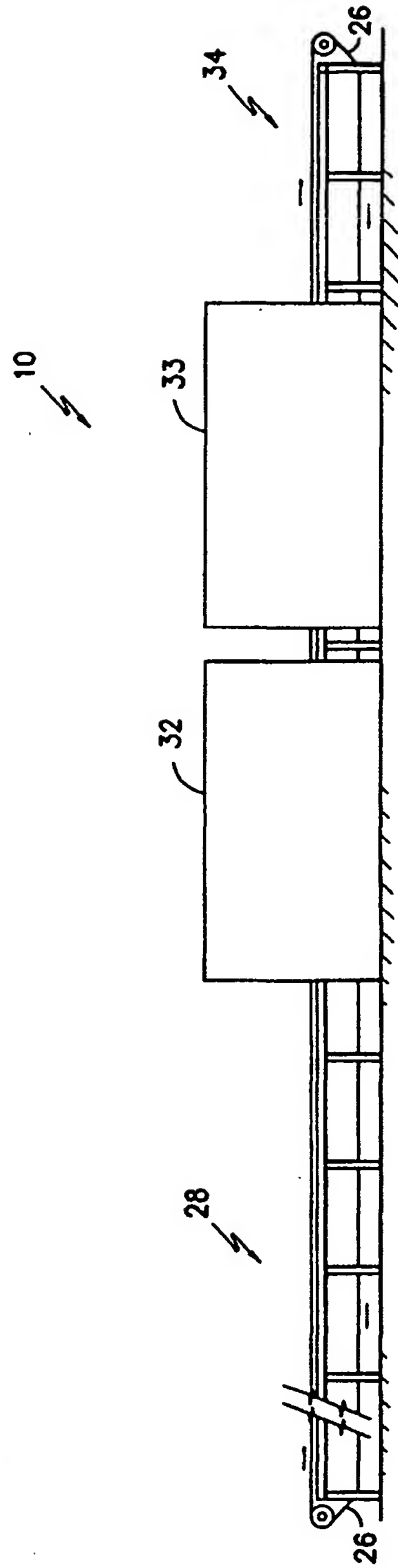

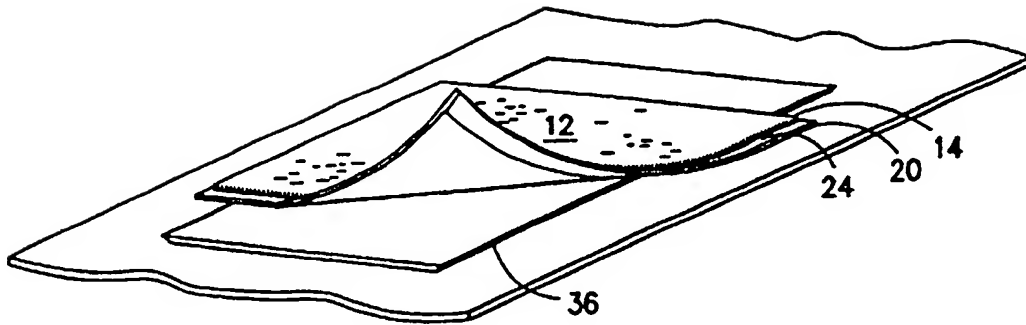


FIG. -2-

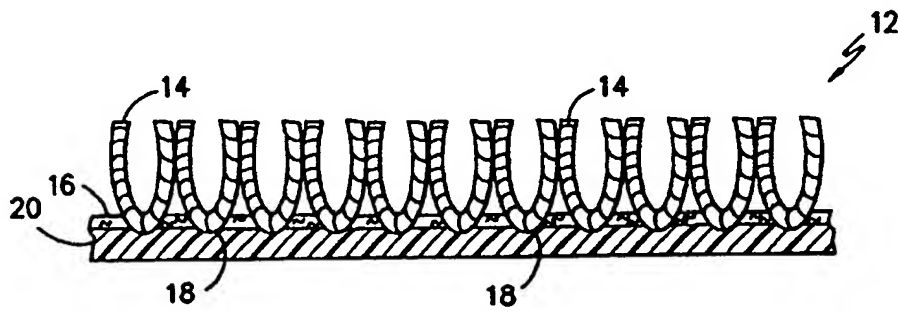


FIG. -3-

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 971 064 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.01.2002 Bulletin 2002/01

(51) Int Cl.7: **D06N 7/00, B32B 25/10,**
A47L 23/26

(43) Date of publication A2:
12.01.2000 Bulletin 2000/02

(21) Application number: **99113255.6**

(22) Date of filing: **08.07.1999**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Milliken & Company**
Spartanburg, SC 29304 (US)

(72) Inventor: **Rockwell, James N. Jr.**
LaGrange, GA 30240 (US)

(30) Priority: **10.07.1998 US 113842**

(74) Representative: **HOFFMANN - EITLE**
Patent- und Rechtsanwälte Arabellastrasse 4
81925 München (DE)

(54) **Floor mat solely comprised of monofilament nylon fiber and having an ozone resistant non-staining backing sheet**

(57) This invention relates to a floor mat primarily for use in an outdoor environment wherein the mat includes a tufted carpet solely comprised of nylon monofilament fibers. Furthermore, this mat comprises a foam rubber backing which possesses a high level of ozone resistance and simultaneously will not appreciably stain a handler's skin or a floor's surface with carbon particles. The utilization of all monofilament nylon fibers provides

for the extremely effective removal of moisture, dirt, and debris from the footwear of pedestrians and also permits easy cleaning and effective drying of the overall article. The utilization of a foam rubber backing also allows for heavy duty industrial-scale laundering in such standard washing machines without appreciably damaging either the washing machines or inventive floor mats themselves.

EP 0 971 064 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 11 3255

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 520 (C-1255), 30 September 1994 (1994-09-30) & JP 06 178754 A (DUSKIN CO LTD), 28 June 1994 (1994-06-28) * abstract *	1	D06N7/00 B32B25/10 A47L23/26
A	EP 0 702 929 A (MILLIKEN RES CORP) 27 March 1996 (1996-03-27) * the whole document *	1-7	
A	EP 0 653 179 A (DUSKIN CO LTD) 17 May 1995 (1995-05-17) * page 5, line 10-57 * * figures 1,2 *	1	
A	US 5 652 038 A (GEREN MICHAEL W) 29 July 1997 (1997-07-29) * column 1, line 1-8 * * column 2, line 26 - column 3, line 50 * * figure 3 *	1	
A	CH 614 853 A (SMITH PETER ASSOCIATES CARPET ; COLLIE CARPETS LTD (GB)) 28 December 1979 (1979-12-28) * claims 1,2 * * column 2, line 57-64 * * example 1 *	1	
A	WO 95 30040 A (KLEEN TEX IND INC ; COMBS JOHN S (US); MCHARGUE MICHAEL (US)) 9 November 1995 (1995-11-09) * page 1, line 1-16 * * page 3, line 6-11 * * page 10, line 5-14 * * claims 1-6,11,14,25 * * figure 1 *	1	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 29 October 2001	Examiner Stabel, A
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document		T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (p04/011)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 11 3255

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

29-10-2001

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 06178754	A	28-06-1994	JP 2667097 B2	22-10-1997
EP 0702929	A	27-03-1996	CA 2155384 A1	27-02-1996
			EP 0702929 A1	27-03-1996
			JP 2889154 B2	10-05-1999
			JP 8187216 A	23-07-1996
			US 5902662 A	11-05-1999
EP 0653179	A	17-05-1995	CA 2135835 A1	18-05-1995
			CN 1107028 A	23-08-1995
			DE 69408097 D1	26-02-1998
			DE 69408097 T2	07-05-1998
			EP 0653179 A1	17-05-1995
			SG 46964 A1	20-03-1998
			US 5524317 A	11-06-1996
US 5652038	A	29-07-1997	NONE	
CH 614853	A	28-12-1979	CH 614853 A5	28-12-1979
WO 9530040	A	09-11-1995	WO 9530040 A1	09-11-1995
			AU 6820794 A	29-11-1995
			EP 0760875 A1	12-03-1997

EPO FORM P0159

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82